

## 26" High Vertical Rack Cabinet for 390ASX, 390ASXT, 3120ASX, & 3120ASXT

Pacific Power Source's Portable Rack option is available for use with the 390ASX, 390ASXT, 3120ASX and 3120ASXT, 9kVA and 12kVA high performance power sources. The AC Power Source may be installed into the purchased rack cabinet on casters prior shipping.

A 26" (15U) rack cabinet is beneficial as a single rack, converting the AC Power Source and accompanying magnetics module into a compact, roll-a-round solution. The 26" (15U) rack is a complete cabinet, including a heavy-duty frame and panels, and is completely assembled prior to shipping. This assembly provides flush mounting within the rack and blank panel coverings for unused space.

### TECHNICAL INFORMATION

*High quality design and construction*

#### Materials:

The highest quality cold rolled steel is used in the fabrication. Frame channels and mounting angles are made from 14-gauge steel; frame bottom gusset plates 11-gauge steel and frame side struts 16-gauge steel.

#### Welding:

Frames are constructed using electronically controlled resistance welders to insure uniform strong welds. Rack welds are constructed using a gas metal arc welding process for the highest attainable weld quality.

#### Fastening:


Captive clip nuts and hardened Phillips head machine screws for fastening panels and other equipment are utilized. This method produces superior fastening strength and allows for quick and easy assembly.

#### Finishing:

High grade modified alkyd "hi-solids" baking enamel finish are used in finishing. Two conveyerized paint lines and baking ovens feature electrostatic painting for the highest quality baked enamel finishes. A state-of-the-art paint laboratory is used to perform a full range of physical testing such as salt spray, humidity, and hardness.

#### Load Capacity:

19" (482.6) enclosures offer exceptional static load capacity rated at 3,500 pounds of material evenly distributed in the frame.

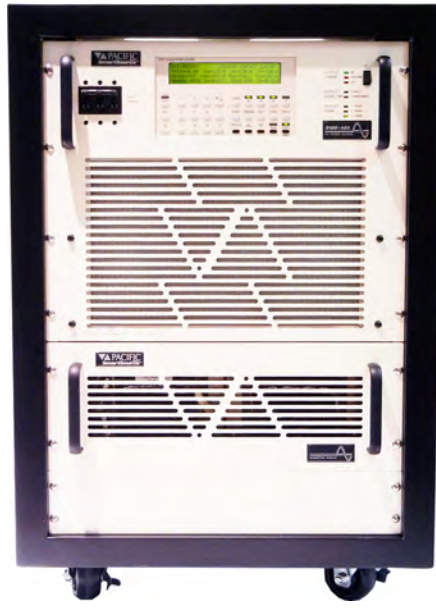

#### Rack Size

#### Approximate Dimensions:

External	H = 33 <sup>7</sup> / <sub>8</sub>	(840 mm)
	D = 31 <sup>9</sup> / <sub>16</sub>	(801 mm)
	W = 22 <sup>9</sup> / <sub>16</sub>	(573 mm)

**Note:** Images shown here reflect 390ASXT and 3120ASXT cabinet system configurations only. Consult factory for other ASX or AMX model installation in same cabinet.



H  
D  
W

All information and specifications are based on our knowledge of the products at the time of printing. We believe this information to be correct; Pacific Power Source reserves the right to change specifications without notice.



17692 Fitch, Irvine, CA 92614 USA

Phone: +1 949.251.1800

Toll Free: 800.854.2433

www.pacificpower.com

Cabinet Only Weight: 116 lbs. (53 Kg)

Total System Weight: 620 lbs. (282 Kg)

© 2012 Pacific Power Source, Inc. Subject to change without notice. #DSP000828-0414

