

Introducing the GSZ Series


The Industry's Most Flexible,
Comprehensive, and Intelligent
Regenerative Grid Simulator,
Optional Load, with PHIL



Regenerative




PHIL
Interface Option



Constant
Power



High
Current



Wide
Frequency
Range



Scalable
Power

Key Features

- Regenerative Grid Simulator
 - » 4-Quadrant AC & DC Power Source
 - » AC/DC Electronic Load Option
- Available Models 30kW, 45kW & 55kW; Parallel up to 550kW; Three-Phase High Power Systems available up to 1.1MW+
- Three Phase, Split Phase and Single Phase Output Modes
- AC, DC, AC+DC or DC+AC Output Capability
- Dual Constant Power Voltage with Wide Operating Range
 - » AC Voltage Ranges:
0-240 V LN / 0-415 V LL, and 0-480 V LN / 0-830 V LL
 - » DC Voltage Ranges:
0-340 Vdc and 0-680 Vdc
- Frequency Range 15 - 200Hz
- Wide Range Programmable R and L Impedance
- Phase Angle Programming
- Galvanic Isolation from Facility AC Input to Output and Between Output Phases / Channels
- Dynamic, Quiet, Efficient Operation Using Silicon Carbide (SiC)
- High AC Current Range
- High Speed Waveform Capture and Scope Display
- Powerful Line Disturbance Tools
 - » Generate Harmonics and Interharmonics
- High Speed Analog I/O for PHIL Mode (Option H)
- **SmartSource Suite** Web Browser Control
- IEC61000-4-13 Inter-Harmonics Test

GSZ Series

Regen Grid Simulator & Load up to 1.1MW+

The GSZ Series is a Regenerative AC/DC power source that can function as a grid simulator, electronic load, and PHIL interface for power hardware-in-the-loop applications. Its wide operating range in power, voltage, and current is available in 30kW, 45kW, and 55kW models. Parallel cabinets up to 550kW. Three-Phase High Power Systems available up to 1.155MW+.

This comprehensive platform is optimized for PHIL, has three powerful DSPs to cover advanced applications, and eliminates the need for add-on equipment. It has highly versatile channel outputs for different dynamic applications, and advanced control and programming capabilities.

The wide selection of power, frequency, and phase angle modes allow you to test a broad range of grid-tied products in the renewable energy, electric vehicle charging and industrial markets.

Application Examples:

- EV Charging, On Board Chargers (OBC), Wallboxes, V2G, V2H, V2X, and EV Charging Cables
- Solar PV/Grid-Tied Inverters
- Closed Loop PHIL Micro-Grid Simulation
- Energy Storage Systems (ESS), Home ESS
- Renewable Energy Smart-Grid Simulation
- Bidirectional Applications (e.g. motor drives)
- EMC Compliance Testing



Flexible Control

Dual Constant Power Voltage & Current Ranges

The GSZ series supports both low and high voltage ranges for either AC or DC mode. In AC mode, constant power is available from 52% of full scale voltage to 100% of full scale voltage as shown in Figure 1 & 3 below.

This allows higher currents to or from the UUT at lower than full scale voltage than would otherwise be possible. For voltage settings below 52% of full scale, current remains at max. rated current.

On 3550AXX models, both high and low voltage ranges support 75A rms load current at up to 240Vac. This supports Harmonics & Flicker testing to the maximum required EUT current per IEC 61000-3-11 & IEC 61000-3-12 standards.

In DC mode, constant power is available from 50% of full scale voltage to 100% of full scale voltage as shown in Figure 2 & 4 below.

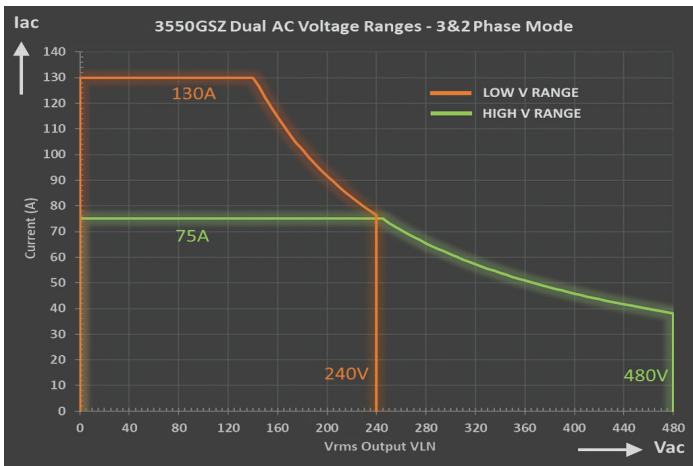


Figure 1: High and Low AC Voltage Ranges - Current vs. Voltage - 55kW

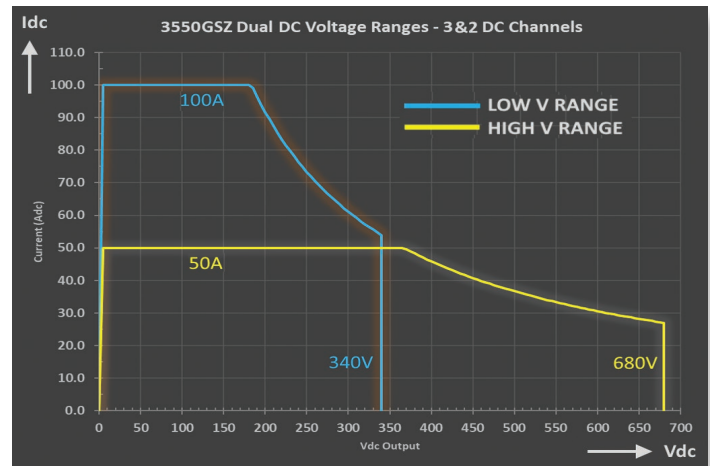


Figure 2: High and Low DC Voltage Ranges - Current vs. Voltage - 55kW

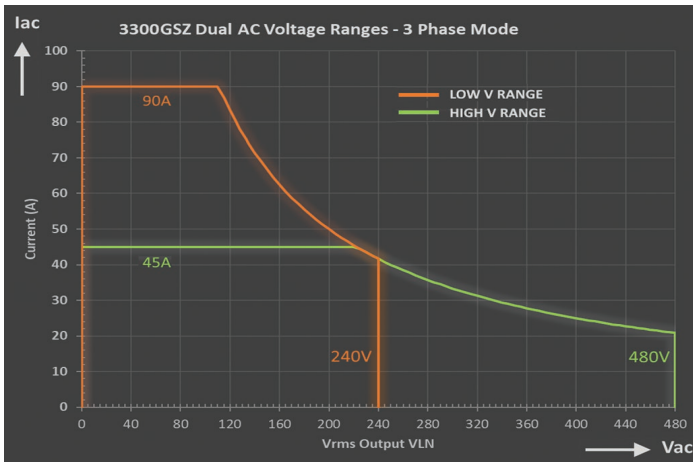


Figure 3: High and Low AC Voltage Ranges - Current vs. Voltage - 30kW


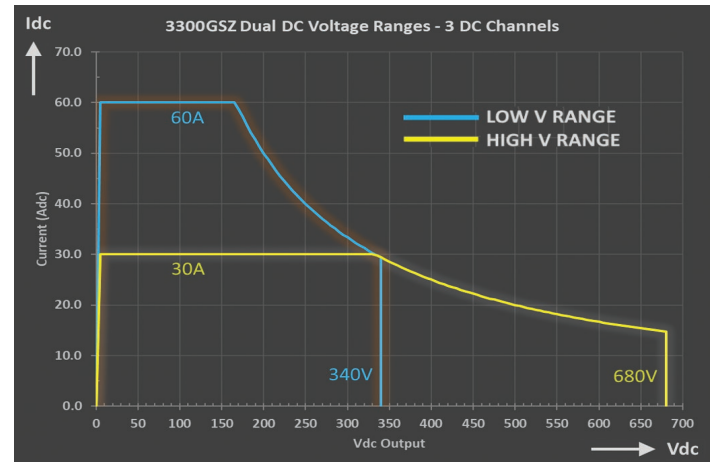


Figure 4: High and Low DC Voltage Ranges - Current vs. Voltage - 30kW

Ultimate Flexibility With Six Output Configurations

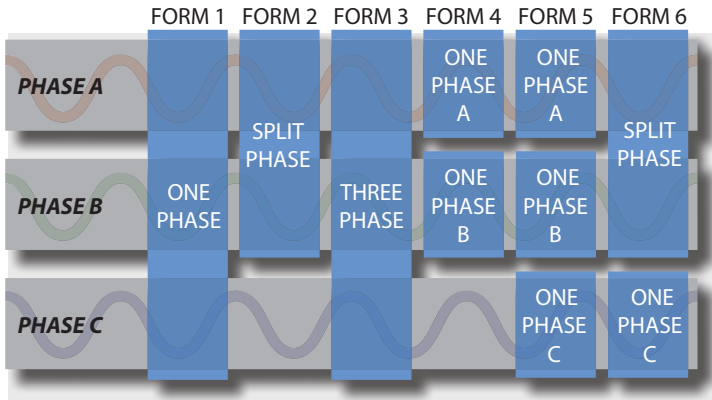


Simultaneous AC & DC Operation on Individual Phases and Automatic Switching of Operation Modes

In addition to the conventional single, split and three phase output modes, the GSZ also supports fully independent output modes for either 2 or 3 'channels'. In these modes, each channel can be set to have a different operation mode (Voltage Source, Current Source or Load) and frequency (for AC). Specify option "W" to have the factory disconnect the three neutral terminals shorting bar to support 3 fully isolated channels.

Optimized for Power HIL

The GSZ Series can be used as an amplifier for PHIL Applications. This analog interface provides high speed input for controlling frequency, voltage or current and waveshape. Amplifier latency is typically less than 50 usec. Voltage and Current output capture signals are returned to the simulation system. These analog I/O lines can be connected to commercially available HIL systems.

PHIL Simulation Workflow

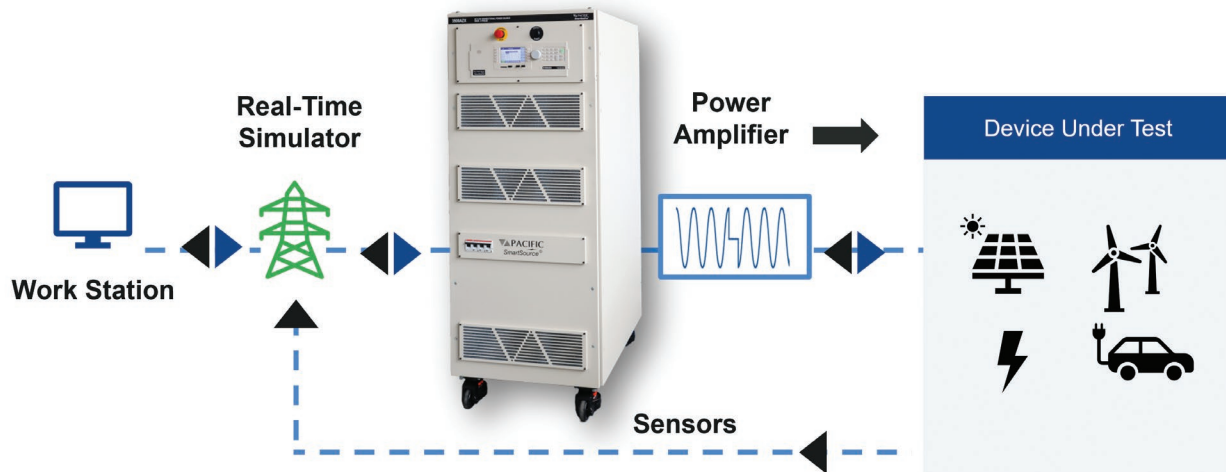


Regenerative Power Saves Significant Energy and Costs

Regenerative AC & DC power sources provide energy efficiency and significant cost savings by returning energy back to the facility or the grid. The GSZ produces less heat, ensures a stable testing environment for reliability reducing the need for additional cooling systems. Regenerative bidirectional power flows are critical for simulating real-world conditions in transportation and renewable energy systems.


Powerful Waveform & Measurement Tools

The GSZ has a built-in waveform digitizer and fast transient capabilities at 100 μ sec time resolution, supporting LIST, PULSE and STEP modes. Waveform generation includes ten Standard, Sine, Square, Triangle, Clipped, Harmonics and Inter-harmonics.


The waveform digitizer is complemented by a digital measurement system with scope function. Capture advanced measurements and waveforms.

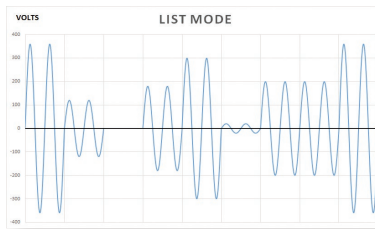

List Mode

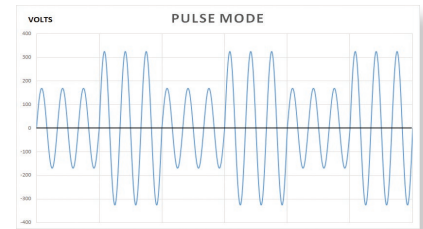

Pulse Mode

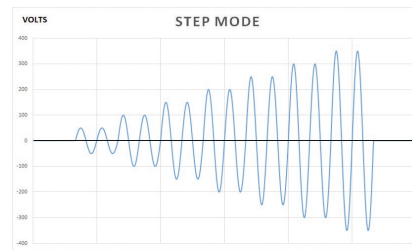

Step Mode

Fully Test AC Power with 4-Quadrant Load (Option L)



Optional load feature also supports testing PV inverters, V2G, EV Chargers, EVSE, batteries, UPS, and AC/DC power supplies. A key advantage of the GSZ Regenerative Load Option is its ability to operate in all four quadrants using programmable phase shift in CC or CS modes.

Compared to 2-Quadrant non-regenerative AC loads, the GSZ allows simulation of inductive and capacitive loads to fully test AC power sources, as shown in the leading and lagging power factor examples.

The "L" Option adds Regenerative Electronic Load capability providing several AC and DC operating modes to push the boundaries of test environment. Simulate linear and non-linear loads (rectified), inductive and capacitive loads.

AC Modes: Constant Current, Constant Power & Apparent Power, Constant Resistance, Constant Voltage, CC+CR, CC / CS Rectifier Mode 1 ϕ & 3 ϕ


DC Modes: Constant Current, Constant Power, Constant Resistance, Constant Voltage, CR+CC

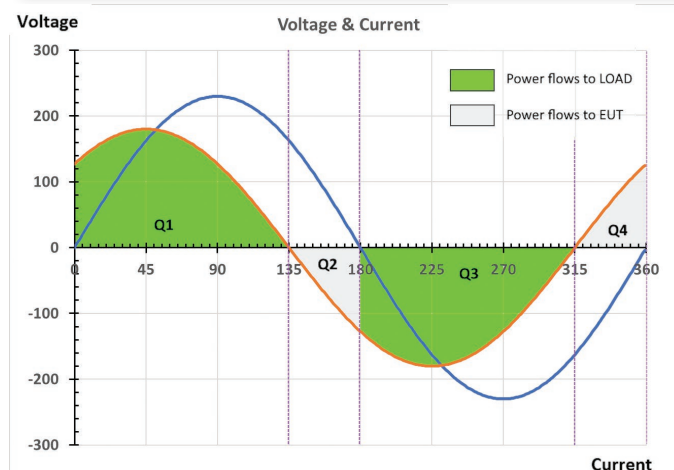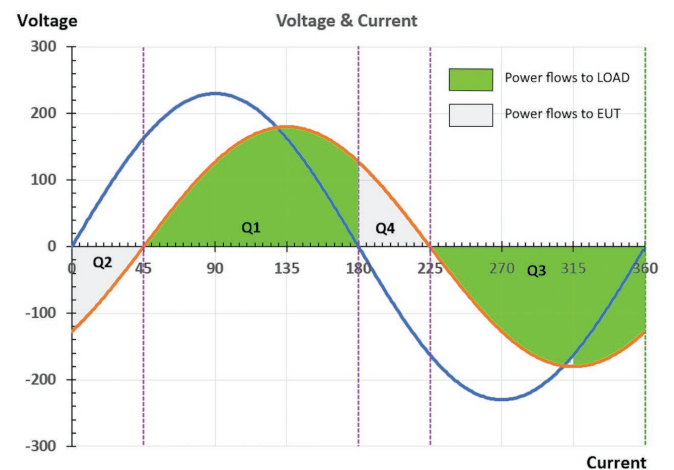

User Friendly Control Options

Multiple integrated control options include:

- Intuitive Touch Screen LCD Display with Soft Key driven Menus
- **SmartSource Suite** Web Interface
- LAN, GPIB, RS232 & USB Interfaces, and ModBus (optional)
- Supports external touch screen monitor via Video Output Interface

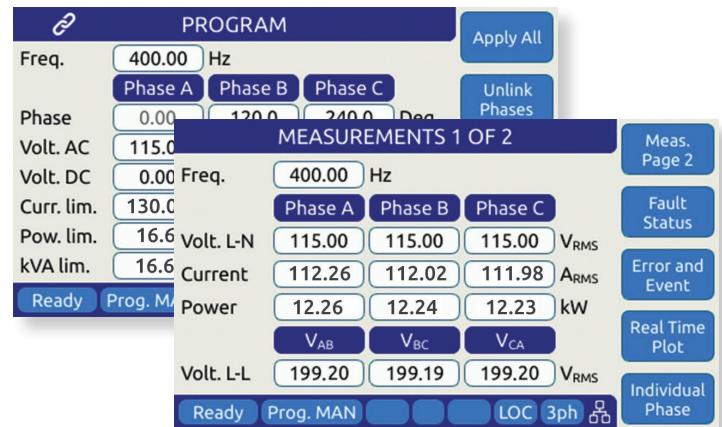

Simplify Test Automation with SmartSource Suite Remote Control Platform

Easily monitor, control, and manage testing with the GSZ's **SmartSource Suite** remote control platform. Use the embedded, web browser interface with real-time control. Access control panels and test sequences on-premises or on any mobile device (laptop, phone, tablet) via secure client access.

- Full control and measurement capability
- Program settings and measurement read back including digital scope and harmonics data
- Extensive safety protection settings
- Waveform selection, preview and edit modes
- Execution of user's custom test sequences
- Transient data entry and execution screen using a spreadsheet layout

Built-in Galvanic Isolation Reduces Safety Risks

The GSZ provides both facility-to-output isolation, and phase to phase or channel to channel isolation. Galvanic isolation provides complete separation between the input and output so there is no electron flow between channels. Channel to channel isolation provides flexibility to use each phase as its own independent power source with full frequency and voltage control. The GSZ's fully isolated design reduces safety risks for the operator and prevents unexpected UUT damage by preventing unwanted current or ground loops. This built-in capability doesn't require a transformer which saves significant costs and space.

Modular Power Systems up to 1.1MW+


The GSZ Series provides modular and scalable power to meet changing test requirements. Easily parallel multiple cabinets to achieve higher power. Cabinets can be paralleled up to 550kW. Three-Phase High Power System configurations are available up to 1.155MW+.

The ease of reconfiguration allows for flexible test set ups and reduces downtime for repairs or maintenance. Its top vent, air-cooled design allows the flexibility to place the GSZ cabinets against a wall or back-to-back if needed, maximizing floor space.

This robust solution also has a built-in line transformer and EMI input filters that provides galvanic isolation between the grid and the unit under test, which is ideal for use in environments where grid power may be highly distorted or 'dirty'.



GSZ Cabinet Dimensions

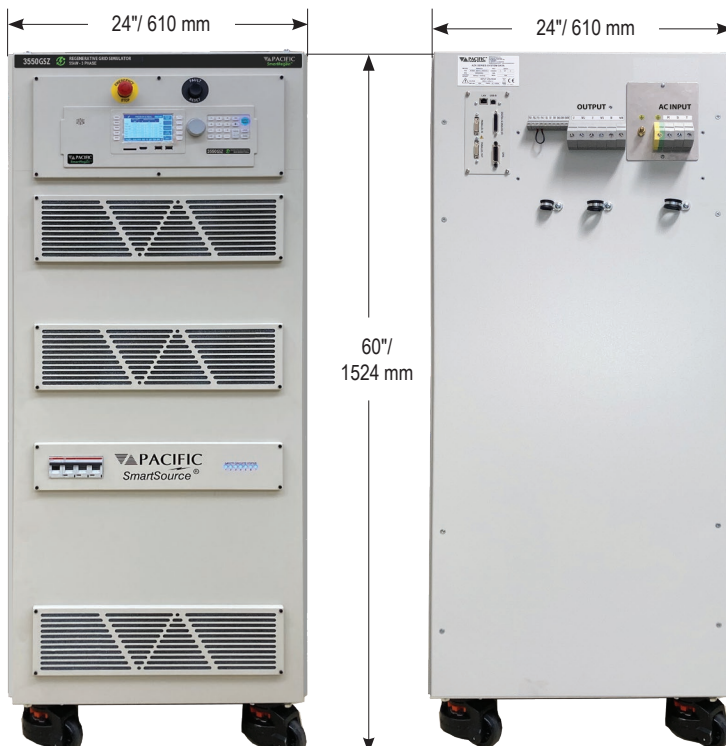

The GSZ is housed in a custom floor standing cabinet on locable casters for easy of movement and placement.

Depth of the cabinet is only 32.0 inches / 813 mm and not clearance is required behind the GSZ cabinet rear as air is vented out through the top of the cabinet..

The GSZ Rear Panel provides connections for AC Input, AC or DC Output, External Sense, Aux I/O, remote control interfaces, parallel bus connections and optional HIL Interface connector.

A safety cover for all power connections is included with each unit. (Not shown).

Technical Specifications

| MODEL: | 3300GSZ | 3450GSZ | 3550GSZ |
|--|--|-----------------------------------|---|
| Modes of Operation | | | |
| Regenerative Grid Simulator, Regenerative DC Power Source. Regenerative Electronic Load optional | | | |
| AC or DC Output | | | |
| Phase Modes (Form) | 1, 2 or 3 | 1, 2 or 3 | 1, 2 or 3 |
| Maximum Power (Total) | 30 kW/kVA | 45 kW/kVA | 55 kW/kVA ¹ |
| Per Phase / Channel | 10 kW/kVA | 15 kW/kVA | 18.3 kW/kVA |
| Voltage ¹ | | | |
| Ranges | AC High Range: 0 ~ 480 V _{LN} / 0 - 830 V _{LL} DC High Range: 0 ~ ±680 V _{DC} AC Low Range: 0 ~ 240 V _{LN} / 0 - 415 V _{LL} DC Low Range: 0 ~ ±340 V _{DC} | | |
| Resolution | 0.01 V | Accuracy | ± 0.1% F.S |
| Harmonic Distortion R Load | < 100 Hz: < 0.2%, 100~1000 Hz: < 0.2% + 0.125%/100Hz | | |
| Load Regulation | ± 0.02% (CSC Mode) | Line Regulation | < 0.1% for 10% Line Change |
| Phase Angle - Range (B, C) | | | |
| Maximum Current (Low Voltage Range, High Voltage Range) | | | |
| Three Phase modes AC / DC | 90.0, 45.0 Arms / 60.0, 30.0 Adc | 110.0, 65.0 Arms / 80.0, 40.0 Adc | 130.0, 75.0 Arms / 100.0, 50.0 Adc |
| Split Phase modes AC / DC | 117.0, 68.0 Arms / 90.0, 45.0 Adc | 125.0, 72.0 Arms / 95.0, 47.5 Adc | 130.0, 75.0 Arms / 100.0, 50.0 Adc |
| Single Phase mode AC / DC | 270.0, 135.0Arms/180.0,90.0Adc | 330.0,195.0Arms/240.0,120.0Adc | 390.0,225 Arms/300.0,150.0Adc |
| Max. Peak Current per phase (AC) | 3 & 2 phase mode : Low Vac Range: 360Apk / High, Vac Rang: 180Apk | | |
| Frequency | | | |
| Range | DC, 15 Hz – 200 Hz | Resolution / Accuracy | 0.01 Hz / ± 0.005% (50 ppm) |
| AC Input | | | |
| Input Voltage Range / Freq | 380Vac – 400Vac (-4) or 480Vac (-8) ± 10%, 4 Wire, L1, L2, L3 and PE / 47 - 63 Hz | | |
| Nom.PhaseCurrent@400Vac/480Vac | 54 Arms or 43 Arms | 80 Arms or 65 Arms | 100 Arms or 80 Arms |
| Input Power Factor | > 0.99 @ Full Load | Efficiency | 90 % |
| Measurements | | | |
| Vrms Range / Accuracy | 0 – 480 V _{LN} / 0-830 V _{LL} / 0.1% F.S. | | |
| Irms Range / Accuracy | High Range: 0-130 Arms, Low Range: 0-75 Arms / ± (0.25% + f (kHz) * 0.25%) F.S. | | |
| Power Range / Accuracy | 0 - 30 kVA / ± 0.75 % F.S. | 0 - 45 kVA / ± 0.75 % F.S. | 0 - 55 kVA / ± 0.75 % F.S. |
| Frequency Range / Accuracy | 15 Hz - 200 Hz / 0.1% Rdg | Resolution | 0.01 Hz |
| Transient Functions | | | |
| Programming | 200 Steps / 400 Segments, LIST, PULSE & STEP Modes, Frequency, Volt AC, Volt DC, Waveform, Ramp Time, Dwell Time. Time range: 0.1 - 10000000.0 ms, Time resolution 0.2 ms | | |
| Execution | Run from step # to step #, Run, Step, Restart, Stop | Program Storage: | Non-volatile, 100 Programs + Transients |
| PARAMETERS / FUNCTIONS SPECIFICATIONS | | | |
| Remote Control Interfaces | | | |
| Standard | USB Type B, LAN (LXI), GPIB / IEEE488, RS232, all on rear panel | | |
| Optional | External USB WIFI adapter / ModBus TCP / CAN/CAN-FD | | |
| Analog & Digital I/O | | | |
| Analog I/O Inputs / Outputs | Analog Input: AI1, AI2, AI3 Programmable settings Phase A, B, C; AI4 (Programmable) Analog Output : AO1, AO2, AO3, AO4 (User defined measurement functions) | | |
| Digital I/O Inputs / Outputs | In: Remote Inhibit, Trans. Trig., Phase Sync/ Out: Output Relay, Transient, Function Strobe, Phase Sync | | |
| PHIL Interface (Option H) | Inputs: 3 (Voltage or Current Programming), Outputs: 6 (Voltage and Current), ±10V or ±16V | | |
| Environmental | | | |
| Cooling | Variable Fan Speed, Front Air Intake, Top Exhaust | | |
| Temperature Operating | 0 to 40 °C / 32 to 104 °F | Temperature Storage | -20 to 70 °C/-4 to 158 °F |
| Humidity | < 80%, non-condensing | Altitude | 2000 m / 6500 feet |
| System Features | | | |
| USB Ports | 2 on Front Panel, 1 on Rear Panel, All Type A | | SD Card: 32 GB max. Capacity |
| Dimensions & Weights | | | |
| Chassis Size H x W x D | 59.8" x 24.0" x 31.9" / 1520 x 610 x 810 mm Crated: 71" x 32" x 44" / 1520 x 610 x 810 mm | | |
| Cabinet Weight | 517 Kg / 1140 lbs | Shipping Weight: | 592 Kg / 1305 lbs |
| Regulatory Compliance | | | |
| Safety | IEC 61010-1:2010 (Edition 3) | | |
| EMC - Emissions / Immunity | EN 55011:2009+A1:2010 / EN 61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8 and EN 61000-4 -11 | | |
| Product Category | EN 61326-1:2013 (Measurement, Laboratory and Control Equipment) | | |
| Agency Approvals | CE Mark | RoHS (2011/65/EU): | EN50581:2012 |

Voltage Ranges¹: Voltage Range values are for Source Mode.

For F = 45Hz~1000Hz. For = 1Hz~15Hz: Vac = 225/440Vac LN. Linear interpolation of Vac max from 15Hz to 45Hz

Ordering Information

GSZ Series Models

| Single Cabinets | Parallel Systems | Input Voltage (V _{IN}) Identifier | Options |
|-----------------|------------------|---|-------------------------------------|
| 3300GSZ | 3900GSZ | -4 380-400Vac 3 ϕ \pm 10%, 47-63Hz | A Adds AC+DC Mode |
| 3450GSZ | 31100GSZ | -8 480Vac 3 ϕ \pm 10%, 47-63Hz | B For use with ECTS2 System |
| 3550GSZ | 31650GSZ | | D Safety Performance Level D |
| | 32200GSZ | | F Extends Freq Range to 1000Hz |
| | | Export Version postfix | H Real Time I/O for PHIL (Standard) |
| | | E Append "E" if F option | L Electronic Load Mode |
| | | | W Isolated Neutral Wiring |

Note 1: Contact Factory for higher power GSZ system configurations.

Order Example 3550GSZ-4CL


- GSZ Cabinet, 55 kVA, 3-Phase, Grid Simulator, 380~400Vac input, IEC413, Load option

Typical Delivery Items

- Power Source
- Cert. of Compliance

GSZ Model Configurator

Dashed boxes are optional

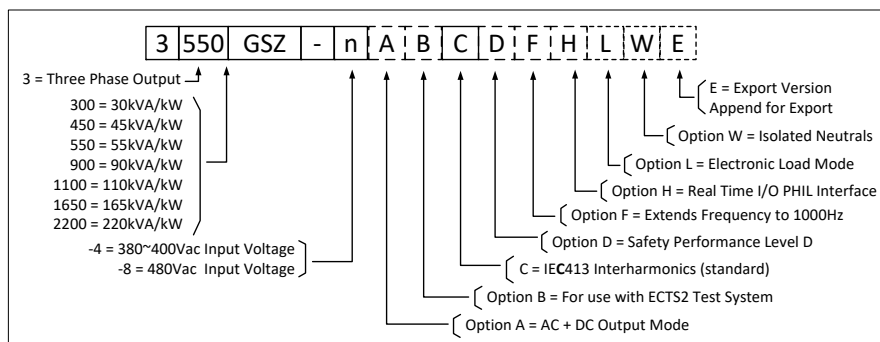

SmartSource Suite Test Sequence Options

IEC Test Sequences

- IEC Test Suite - Includes IEC 61000-4-11p, IEC 61000-4-14, IEC 61000-4-17, IEC 61000-4-27p, IEC 61000-4-28, IEC 61000-4-29p and IEC 61000-4-34p
- IEC 61000-4-13 (Option C)
- KS C 9610-4-11, KS C 9610-4-29

Other Test Sequences

- IEEE 1547.1-2020
- Semi-F47-0706
- MIL-STD 1275 Rev E

Service & Support

NORTH AMERICA

Pacific Power Source, Inc.
Irvine, USA

Phone: +1(949) 251-1800
 Fax: +1 (949) 756-0756
 Email: info@pacificpower.com
 Web: www.pacificpower.com

EUROPE

Pacific Power Source
Europe GmbH.
Kappelrodeck, Germany

Phone: +49 7842 99722-20
 Fax: +49 7842 99722-29
 Email: info@pacificpower.eu
 Web: www.pacificpower.eu

UNITED KINGDOM

Caltest Instruments Ltd.
Petersfield, UK

Phone: +44 (0) 1483 302 700
 Email: sales@caltest.co.uk
 Web: www.caltest.co.uk

CHINA

PPST Shanghai Co. Ltd.
Shanghai, China

Phone: +86-21-6763-9223
 Fax: +86-21-5763-8240
 Email: info@ppst.com.cn
 Web: www.ppst.com.cn

2802 Kelvin Avenue, Suite 100
 Irvine, CA 92614 -5897 USA
 Phone: +1 949.251.1800
 Fax: +1 949.756.0756
 Toll Free: 800.854.2433
 E-mail: sales@pacificpower.com
 Web: www.pacificpower.com

© 2024 Pacific Power Source, Inc. All information subject to change without notice. GSZ-Series 1124